

PRODUCT DESCRIPTION:

QUICK PATCH H2O™ is a black permanent patch for asphalt and may be used on potholes, depressions, driveways, sidewalks, parking lots and roads. It even works on concrete! It is stronger than conventional patches and can be applied in any weather condition. QUICK PATCH H2O™ is traffic ready immediately and will be fully cured in 24 hours. You can seal over repair after 24 hours.

INSTRUCTIONS:

- Remove all loose material from repair and standing water. If applying in winter time, remove any ice or snow.
- Open container and remove bag from pail (do not open bag yet). Work the bag back and forth for a minute to loosen material.
- Open the bag and pour material into pail. Using a hand trowel, scoop QUICK PATCH H2O™ into repair and level with back of a shovel or trowel allowing material to stand approximately 1/2" above repair area.
- Using a watering can, lightly pour / sprinkle water on entire repair allowing water to fully enter repair.
- Using a tamper fully compact the repair to a smooth finish. You can use a cinder block as well. If you have a deep repair (greater than 3") we recommend doing it in 2 lifts.

www.daltoncoatings.com
For warranty visit www.daltoncoatings.com
info@daltoncoatings.com
800-851-5606



Potholes • Edges • Depressions • Berms

QuickPatch H2O™

PERMANENT WATER ACTIVATED PATCH FOR ASPHALT OR CONCRETE

Installs...Easy as...1,2,3

1 Pour into repair, sprinkle/spray with water and compact. QUICK PATCH H2O™ hardens quickly and is foot and car traffic ready immediately!
You can seal over after 24 hours.
Kid and pet safe, NO harmful chemicals...
Pail is recyclable!

Coverage Rate = 5.5 square feet per 55 lbs @ 1" depth or
1.1 square meters per 25kg @ 1cm depth



No Solvents



55 lbs. (24.9 kg.)

STORAGE: Store indoors in cool, dry conditions. Do not store in freezing temperatures. Due to humidity activating product once opened, unused cannot be stored for later use. Clean-up using soap and water, or cleaner with citrus if hardened.

CONTENTS: Asphalt CAS#: 8052-432-4, Stone CAS#: 14808-60-7, Sand/Limestone CAS#: 1317-62-3, Proprietary Ingredients


VOC: < .1% by weight

WARNING: This product can expose you to chemicals including Asphalt and Crystalline Silica, which are known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov

CAUTION! KEEP OUT OF REACH OF CHILDREN



DALTON ENTERPRISES, INC.
Dalton Coatings & QUICK PATCH H2O™ are trademarks of: Dalton Enterprises, Inc.
131 Willow Street
Cheshire, CT 06410
USA
P: (800) 851-5606
F: (203) 271-3396
daltoncoatings.com
Copyright © 2025

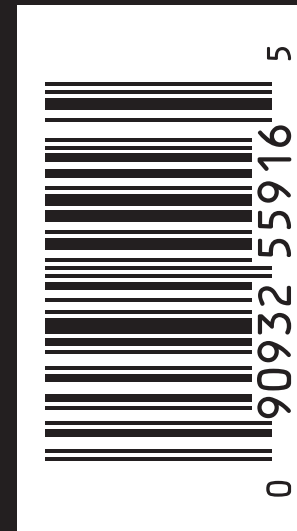

WARNING
AVISO



Children can fall into bucket and drown.
Keep children away from bucket with even a small amount of liquid.

Los niños corren peligro de caerse dentro del balde y ahogarse.
Mantener a los niños lejos de los baldes, incluso cuando sólo tengan una pequeña cantidad de liquido.

Best by Test

QuickPatch H2O™

PERMANENT WATER ACTIVATED PATCH FOR ASPHALT OR CONCRETE



Potholes
Berms



Edges
Depressions



No Solvents PARKING LOTS DRIVEWAYS SIDEWALKS BIKE PATHS

55 lbs. (24.9 kg.)



Last Revised: 6/12/2010